

NORMAFIX® Cable Tie PA 6.6 - Specs

Cable tie for securing cables in electrical installations, industrial wiring, automotive Made of **polyamide 6.6**. Resistant to **extreme temperatures** and numerous external agents. **Quick and safe assembly**. The black cable tie offers excellent **resistance to UV rays** thanks to added "carbon black".

Material with a low coefficient of friction and enlarged end
Faster installation

Made of Polyamide 6.6
Optimum resistance to extreme temperatures, bases, oils, greases ...


Rounded and smooth edges
Easy and safe assembly

"Carbon Black" added in Black cable tie flange
Increased resistance to UV rays
Suitable for outdoor use

Variety of colors
Available in: black, white, red, yellow, green, blue.



Underwriters Laboratories Inc.
File E 86244 (M)

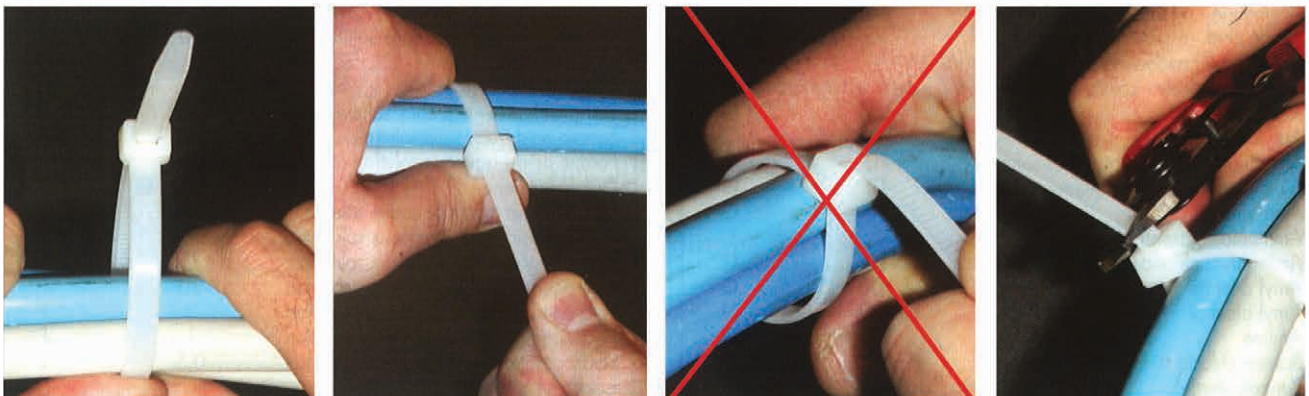



NORMAFIX® Cable Tie White and Black PA 6.6

Measures mm Width x Long	Ø Bundle max (mm)	Tensile strength	Reference		Bag	Carton
			White	Black		
2,5 x 98	21 mm.	8 Kgs.	860 0110 201	860 0210 201	100	1.000
2,6 x 160	40 mm.	8 Kgs.	860 0110 302	860 0210 302	100	1.000
2,6 x 200	52 mm.	8 Kgs.	860 0110 303	860 0210 303	100	1.000
3,6 x 140	35 mm.	13 Kgs.	860 0110 401	860 0210 401	100	1.000
3,6 x 200	50 mm.	13 Kgs.	860 0110 402	860 0210 402	100	1.000
3,6 x 290	80 mm.	13 Kgs.	860 0110 403	860 0210 403	100	1.000
3,6 x 370	103 mm.	13 Kgs.	860 0110 404	860 0210 404	100	1.000
4,5 x 120	24 mm.	20 Kgs.	860 0110 501	860 0210 501	100	1.000
4,5 x 160	40 mm.	20 Kgs.	860 0110 502	860 0210 502	100	1.000
4,8 x 178	45 mm.	22 Kgs.	860 0110 601	860 0210 601	100	1.000
4,8 x 200	50 mm.	22 Kgs.	860 0110 602	860 0210 602	100	1.000
4,8 x 250	68 mm.	22 Kgs.	860 0110 603	860 0210 603	100	1.000
4,8 x 290	79 mm.	22 Kgs.	860 0110 604	860 0210 604	100	1.000
4,8 x 360	103 mm.	22 Kgs.	860 0110 605	860 0210 605	100	1.000
4,8 x 390	106 mm.	22 Kgs.	860 0110 606	860 0210 606	100	1.000
4,8 x 430	115 mm.	22 Kgs.	860 0110 607	860 0210 607	100	1.000
7,8 x 180	45 mm.	55 Kgs.	860 0110 702	860 0210 702	100	1.000
7,8 x 240	63 mm.	55 Kgs.	860 0110 703	860 0210 703	100	1.000
7,8 x 300	80 mm.	55 Kgs.	860 0110 704	860 0210 704	100	1.000
7,8 x 365	100 mm.	55 Kgs.	860 0110 705	860 0210 705	100	1.000
7,8 x 450	130 mm.	55 Kgs.	860 0110 706	860 0210 706	100	-
7,8 x 540	158 mm.	55 Kgs.	860 0110 707	860 0210 707	100	-
7,8 x 750	200 mm.	55 Kgs.	860 0110 708	860 0210 708	100	-
9 x 780	233 mm.	77 Kgs.	860 0110 801	860 0210 801	100	-
12,6 x 500	143 mm.	110 Kgs.	860 0110 902	860 0210 902	50	-
12,6 x 1000	302 mm.	110 Kgs.	860 0110 905	860 0210 905	50	-





NORMAFIX® Cable Tie PA 6.6 - Bulk packaging

Bags of 100 units packed in bulk carton boxes also identified with their reference number and the cable tie colour for better warehouse organisation.

Measures mm Width x Long	∅ Bundle max (mm)	Tensile strength	Reference		Bag	Carton
			White	Black		
2,5 x 98	21 mm.	8 Kgs.	860 0130 201	860 0230 201	100	35.000
2,6 x 160	40 mm.	8 Kgs.	860 0130 302	860 0230 302	100	25.000
2,6 x 200	52 mm.	8 Kgs.	860 0130 303	860 0230 303	100	20.000
3,6 x 140	35 mm.	13 Kgs.	860 0130 401	860 0230 401	100	20.000
3,6 x 200	50 mm.	13 Kgs.	860 0130 402	860 0230 402	100	15.000
3,6 x 290	80 mm.	13 Kgs.	860 0130 403	860 0230 403	100	10.000
3,6 x 370	103 mm.	13 Kgs.	860 0130 404	860 0230 404	100	7.500
4,5 x 120	24 mm.	20 Kgs.	860 0130 501	860 0230 501	100	15.000
4,5 x 160	40 mm.	20 Kgs.	860 0130 502	860 0230 502	100	12.000
4,8 x 178	45 mm.	22 Kgs.	860 0130 601	860 0230 601	100	12.000
4,8 x 200	50 mm.	22 Kgs.	860 0130 602	860 0230 602	100	10.000
4,8 x 250	68 mm.	22 Kgs.	860 0130 603	860 0230 603	100	9.000
4,8 x 290	79 mm.	22 Kgs.	860 0130 604	860 0230 604	100	7.500
4,8 x 360	103 mm.	22 Kgs.	860 0130 605	860 0230 605	100	6.000
4,8 x 390	106 mm.	22 Kgs.	860 0130 606	860 0230 606	100	5.000
4,8 x 430	115 mm.	22 Kgs.	860 0130 607	860 0230 607	100	5.000
7,8 x 180	45 mm.	55 Kgs.	860 0130 702	860 0230 702	100	5.000
7,8 x 240	63 mm.	55 Kgs.	860 0130 703	860 0230 703	100	4.000
7,8 x 300	80 mm.	55 Kgs.	860 0130 704	860 0230 704	100	3.500
7,8 x 365	100 mm.	55 Kgs.	860 0130 705	860 0230 705	100	2.500
7,8 x 450	130 mm.	55 Kgs.	860 0130 706	860 0230 706	100	2.500
7,8 x 540	158 mm.	55 Kgs.	860 0130 707	860 0230 707	100	2.000
7,8 x 750	200 mm.	55 Kgs.	860 0130 708	860 0230 708	100	1.200
9 x 780	233 mm.	77 Kgs.	860 0130 801	860 0230 801	100	1.000
12,6 x 500	143 mm.	110 Kgs.	860 0130 902	860 0230 902	50	1.000
12,6 x 1000	302 mm.	110 Kgs.	860 0130 905	860 0230 905	50	500

Cable tie Hand Tools

For cable tie PA 6.6



Reference: 860 1000 001

From 2,2 to 4,8mm.



Reference: 860 1000 004

From 4,8 to 7,8mm

For cable tie PA 6.6 y PA 12



Reference: 860 1000 005

From 3,6 to 13mm.



Reference: 860 1000 006

From 3,6 to 9 mm.

NORMAFIX® CT Bylon plug support flange PA 6.6

It allows the installation of the cable tie into the wall.




Denomination	Reference			Bag	
	White	Black	Gray		
without fins base 8 mm	860 0701 002	860 0701 001	-	100	
with fins	base 6 mm	860 0701 112	860 0701 111	860 0703 111	100
	base 8 mm	860 0701 102	860 0701 101	860 0703 101	100

NORMAFIX® CABLE TIE SUPPORT WITHOUT STICK

Quick and easy installation. It allows the cable tie installation into the wall



Reference		Cable tie width mm.	Dimensions (mm.)					Bag
White	Black		A	B	C	F	H	
860 0911 001	860 0912 001	3,6	19	19	4,1	4	5	100
860 0911 002	860 0912 002	4,8	27	27	4,8	6	6,5	100

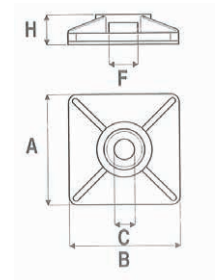

NORMAFIX® CABLE TIE SUPPORT WITH STICK

Immediate positioning. Resistant to high temperatures and UV. Applicable on all surfaces.



Reference		Cable tie width mm.	Dimensions (mm.)					Bag
White	Black		A	B	C	F	H	
860 0931 001	860 0932 001	3,6	19	19	4,1	4	5	100
860 0931 002	860 0932 002	4,8	27	27	4,8	6	6,5	100

